



18VDC Surface Mount Multilayer Chip Varistors SV0402E180G2B SMD Lead Free Type

Our Product Introduction

Basic Information

- Place of Origin: Shenzhen Guangdong China
- Brand Name: SOCAY
- Certification: REACH RoHS ISO
- Model Number: SV0402E180G2B
- Minimum Order Quantity: 10000PCS
- Price: Negotiable
- Delivery Time: 5-8 work days



Product Specification

- Name: Multilayer Chip Varistor
- Package: SMD0402
- Vdc (Max.): 18V
- Vv (Min.): 46V
- Vv (Max.): 60V
- Vc (Max.): 110V
- Imax: 1A
- Cp (Typ.): 1pF
- Highlight: 18VDC Multilayer Chip Varistor,
Multilayer Chip Varistor Lead Free,
18VDC Surface Mount Varistors



for more products please visit us on socaydiode.com

Product Description


18VDC Surface Mount Multilayer Varistor SV0402E180G2B SMD Quick Response Time (<1ns)

Multilayer Varistor DATASHEET: [SV0402E180G2B_v89.1.pdf](#)

Description:

The Multilayer Varistor SV0402E180G2B is based on Multilayer fabrication technology. These components are designed to suppress a variety of transient events, including those specified in IEC 61000-4-2 or other standards used for Electromagnetic Compliance (EMC). The SV0402E9R0G0B is typically applied to protect integrated circuits and other components at the circuit board level. It can operate over a wider temperature range than zener diodes.

Equivalent Circuits:



Electrical Characteristics (25±5):

Symbol	Minimum	Typical	Maximum	Units
VDC	—	—	9	V
VV	11	—	17	V
VC	—	—	35	V
CP	—	5	—	pF

VDC – Maximum DC operating voltage the varistor can maintain and not exceed 10μA leakage current.

VV – Voltage across the device measure at 1mA DC current.

Equivalent to VB “breakdown voltage”

VC – Maximum peak current across the varistor with 8/20μs waveform and 1A pulse current.

CP – Device capacitance measured with zero volt bias 1Vrms at 1MHz. The pF is ±30%.


Multilayer Varistor Features:

- u Lead Free type
- u SMD type zinc oxide based ceramic chip
- u Insulator over coat keeps excellent low and stable leakage current
- u Plating termination provided good solderability characteristic
- u Quick response time (<1ns)
- u Low clamping voltage
- u Meet IEC61000-4-2 standard
- u Low capacitance can meet high speed single transient voltage protection

Multilayer Varistor Applications:

- u Low capacitance product applications for high-speed signal lines such as HDMI, DVI, USB, IEEE 1394 Port etc.
- u Normal capacitance product applications for I/O Port (RS232, USB, PS2, VGA, Audio) on Mother Board and Notebook, Set-Top Box, MP3 Players, DVD Players, and Docking System etc.

Multilayer Varistor Construction & Dimensions:




Size EIA (EIAJ)	0402 (1005)	
Symbol	Inches	Millimeters
L	0.038±0.005	0.96±0.12
W	0.019±0.003	0.48±0.07
T	0.020±0.004	0.50±0.10
C	0.010±0.006	0.25±0.15

General Technical Data:

Operating Temperature		-40 ~ +85°C
Storage Temperature		-40 ~ +85°C
Response Time		<1 ns
Solderability		245±5°C, 3±1sec
Solder leach resistance		260±5°C, 10±1sec
Taping Package Storage Condition	Storage Temperature	5 ~ 40°C
	Relative Humidity	To 65%
	Storage Time	12 Months max

Multilayer Varistor Environmental Performance:

Item	Specifications	Test Condition
Bias Humidity	$\Delta V_V / V_V \leq \pm 10 \%$	90%RH, 40°C, Working Voltage, 1000 hrs
Thermal Shock	$\Delta V_V / V_V \leq \pm 10 \%$	-40°C to 85°C, 30 min. cycle, 5 cycles
Full Load Voltage	$\Delta V_V / V_V \leq \pm 10 \%$	Working Voltage, 85°C, 1000 hrs

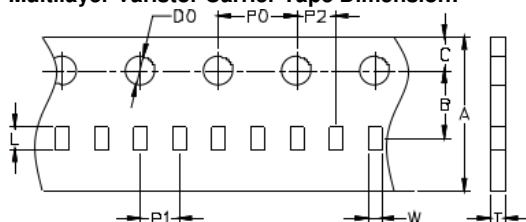Multilayer Varistor Carrier Tape Dimension:

Size EIA (EIAJ)	0402 (1005)	
Symbol	Inches	Millimeters
A	0.315±0.012	8.00±0.30
B	0.138±0.002	3.50±0.05
C	0.069±0.002	1.75±0.05
D0	0.061±0.002	1.55±0.05
P0	0.157±0.004	4.00±0.10
P1	0.079±0.002	2.00±0.05
P2	0.079±0.002	2.00±0.05
W	0.023±0.001	0.59±0.03
L	0.044±0.001	1.12±0.03
T	0.024±0.001	0.60±0.03

Quantity of Products in the Taping Package:

SIZE EIA (EIAJ)	0402 (1005)
Standard Packing Quantity (PCS / reel)	10,000



 **Shenzhen Socay Electronics Co., Ltd.**



+8618126201429



sylvia@socay.com



socaydiode.com

4/F, Block C, HeHengXing Science & Technology Park, 19 MinQing Road, LongHua District, Shenzhen City,
GuangDong Province, China