

SOCAY Sealed NTC Temperature Sensor MF72-SCN5D-13 5ohm 13mm Waterproof

Basic Information

• Place of Origin: Shenzhen, Guangdong, China

• Brand Name: SOCAY

Certification: UL,REACH,ROHS,ISOModel Number: MF72-SCN5D-13

Minimum Order Quantity: 250PCSPrice: 0.01~0.3USD

Packaging Details: BulkDelivery Time: 5-7 days

Payment Terms: T/T, Western Union, MoneyGram

Supply Ability: 250,000PCS Per Month



Product Specification

• Resistance At 25 ±20%: 8Ω

 Max. Permissible Working 4A Current:

Current.

• Resistance Under Load 5Ω

 $(m\Omega)$:

· MOQ:

Dissipation Factor: 15mW/
Thermal Time Constant: 125mΩ
Maximum Permissible Capacitance @240Vac: 15mW/

Body Size: 68Secs.

• Highlight: 13mm NTC Temperature Sensor,

250PCS

NTC Temperature Sensor MF72-SCN5D-13,

Waterproof NTC Thermistor



More Images





Product Description

SOCAY Power NTC Thermistor MF72-SCN5D-13 4Ω 13mm Wide Resistance Range

DATASHEET: MF72-SCN5D-13_v2105.1.pdf

Product Details:

Brand Name:SOCAY Place of Origin:Shenzhen,Guangdong,China Model Number:MF72-SCN8D-13 Certification:UL,REACH,ROHS,ISO Body size: Φ13mm RoHS & Halogen Free (HF) compliant Wide resistance range High power rating Cost effective Operating temperature range: -40 ~ +170

Payment & Shipping Terms:

Price:Negotiable Minimum Order Quantity:250PCS Packaging Details:Bulk Delivery Time:5-7 days Supply Ability:250,000PCS Per Month Payment Terms:T/T,Paypal,Western Union,Money gram

Recommended Application:


Transformer Switch mode power supply Electric motor Projector Adapter LED driver circuit Halogen lamp

Storage Conditions of Product:

Storage Conditions: Storage Temperature: -10 \sim +40 . Keep away from corrosive atmosphere and sunlight Relative Humidity: ≤75%RH.

Period of Storage:

Electrical Characteristics									
Part Number	R25(Ω)	lmax	δ(mW/)	Resistance under Load(mΩ)	τ(Sec.)	C(uF)			
MF72-SCN5D-13	5Ω	5A	15	125	68	330			

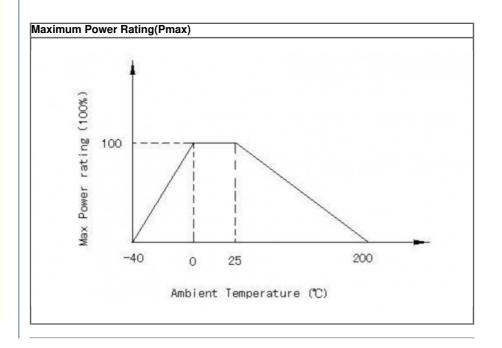

MF72-SCN5D-13	Quantity (pcs/bag)
L short	250
L long	250


Reliability						
Item	Test conditions / Methods	Test Result				
Tensile Strength of Terminals	Fasten body with a Load Applied to each lead 3.0Kg for 1sec.	No break out and damage				
Bending Strength of Terminals	Fixed body hand 1.0kg on one terminal bend 90 then back again oppsite.	No break out and damage				
Solder Ability	When the Lead wire was dipped into bath 0f 235 \pm 5 $^{\circ}\mathrm{C}$ for 3 seconds after immersion in 25% rosin flux the solder ability ratio of lead wire surface should more than 95%.	More than 95% solder ability				
Temp. Cycle Test	(-40°C ×→+25°C ×3min) × 5Cycles (-85°C ×→+25°C ×3min) × 5Cycles	ΔR/R ≤ ±20 %				
Humidity Test	45℃ 95%RH×1000 hours	ΔR/R ≤ ±20 %				
Load Life	6 AMP×1000 hours	ΔR/R ≤ ±20 %				
Insulation Test	DC 700V	R≥500MΩ				

Product Display:







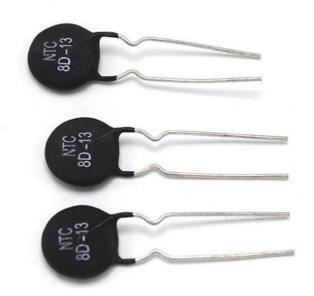


Other Hot Products:

- 1.TVS diodes,
- 2.Gas discharge tubes (GDT) serises,
- 3.ESD,
- 4.TSS,
- 5.Fuses(PPTC), 6.Varistors(MOV/(MLV),
- 7.SPG,
- 8. Schottky diodes (Schottky) Zener diodes, etc.

About Company:



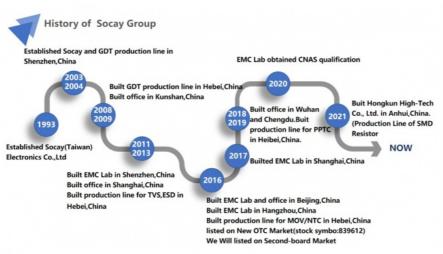





5 invention patents

42 utility model patents

16 Design patent









Delivery Service:











FAQ:

- Q: May we get some samples?
- A: Of course, samples are available.
- Q: What is product lead time?

For GDT, TVS, and ESD, the lead time will 1-2 weeks. For TSS, MOV, MLV, NTC, and PPTC, the lead time 2-3 weeks. According your specific requirements, we will further confirm the accurate lead time.

Q: Do you support customization?

A: Of course, We do.

Please feel free to contact us if you have any question.

Contact Person: Aria Wei

Tel/WhatsApp/Wechat/Skype: +8615778830733

Email Address: sc72@socay.com

Website: www.socay.com / www.socay.en.alibaba.com

Address: Floor 4, Building C, Hengxing Science park, No.19 Minqing Road, Longhua District, Shenzhen



+8618126201429

sylvia@socay.com

socaydiode.com

4/F, Block C, HeHengXing Science & Technology Park, 19 MinQing Road, LongHua District, Shenzhen City, GuangDong Province, China